


HYDRAULIC MOTORS MLHM



APPLICATION

- » Conveyors
- » Textile machines
- » Mining machinery
- » Machine tools
- » Ventilators
- » Construction plant equipment and access platforms etc.

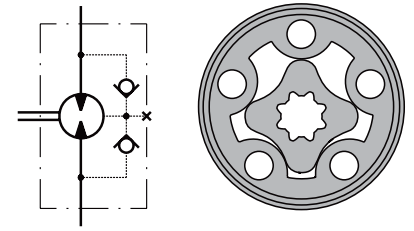

CONTENTS

Specification data	5
Function diagrams	6+8
Dimensions and mounting ...	9+10
Shaft extensions	11
Permissible shaft loads	11
Order code	12


OPTIONS

- » Model- Spool valve, gerotor
- » With or without flange
- » Side and rear ports
- » Series with pressure valve(s)
- » Shafts- straight and splined
- » Metric and BSPP ports
- » Speed sensing;
- » Other special features



GENERAL

Max. Displacement, in ³ /rev [cm ³ /rev]	3.05 [50]	
Max. Speed, [RPM]	2440	
Max. Torque, lb-in [daNm]	cont.: 398 [4,5]	int.: 513 [5,8]
Max. Output, HP [kW]	4,3 [3,2]	
Max. Pressure Drop, PSI [bar]	cont.: 1500 [105]	int.: 2030 [140]
Max. Oil Flow, GPM [lpm]	6.6 [25]	
Min. Speed, [RPM]	20	
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)	
Temperature range, °F [°C]	-40+284 [-40+140]	
Optimal Viscosity range, SUS [mm²/s]	98+347 [20+75]	
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)	


MLHMP Series with Integrated Internal Crossover Relief Valve
A → B, Δp=1450 or 725 PSI [100 or 50 bar]



MLHMP Series with Integrated Internal Crossover Relief Valve
B → A, Δp=1450 or 725 PSI [100 or 50 bar]

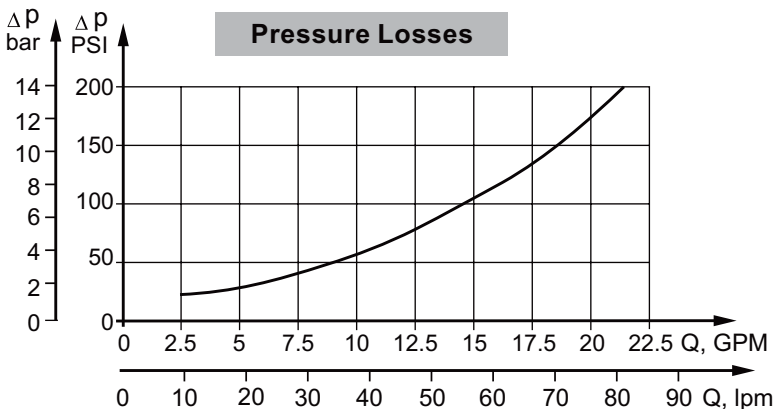

MLHMD Series with Integrated Internal Crossover Relief Valves
A ↔ B, Δp=100 or 50 bar [1450 or 725 PSI]

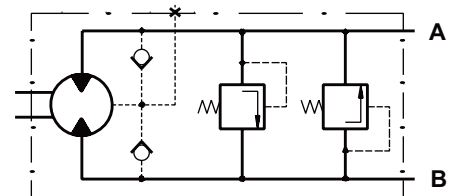

SPECIFICATION DATA

Type		MLHM 8	MLHM 12.5	MLHM 20	MLHM 32	MLHM 40	MLHM 50
Displacement, in³/rev. [cm³/rev.]		.5 [8,2]	.79 [12,9]	1.22 [20]	1.93 [31,8]	2.44 [40]	3.05 [50]
Max. Speed, [RPM]	Cont.	1950	1550	1000	630	500	400
	Int.*	2440	1940	1250	790	625	500
Max. Torque lb-in [daNm]	Cont.	106 [1,2]	150 [1,7]	230 [2,6]	375 [4,2]	375 [4,2]	398 [4,5]
	Int.*	133 [1,5]	205 [2,3]	311 [3,5]	506 [5,7]	506 [5,7]	513 [5,8]
	Peak**	187 [2,1]	293 [3,3]	453 [5,1]	568 [6,4]	584 [6,6]	708 [8]
Max. Output HP [kW]	Cont.	2.4 [1,8]	3.3 [2,4]	3.3 [2,4]	3.3 [2,4]	2.5 [1,8]	2.48 [1,7]
	Int.*	3.6 [2,6]	4.3 [3,2]	4.3 [3,2]	4.3 [3,2]	4 [3,0]	2.8 [2,1]
Max. Pressure Drop PSI [bar]	Cont.	1500 [105]	1500 [105]	1500 [105]	1500 [105]	1200 [82,5]	1015 [70]
	Int.*	2030 [140]	2030 [140]	2030 [140]	2030 [140]	1600 [110]	1300 [90]
	Peak**	2900 [200]	2900 [200]	2900 [200]	2900 [200]	2000 [140]	1815 [125]
Max. Oil Flow GPM [lpm]	Cont.	4.2 [16]	5.5 [20]	5.5 [20]	5.5 [20]	5.5 [20]	5.5 [20]
	Int.*	5.5 [20]	6.6 [25]	6.6 [25]	6.6 [25]	6.6 [25]	6.6 [25]
Max. Inlet Pressure PSI [bar]	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, PSI [bar]	Cont. 0-100 RPM	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Cont. 100-400 RPM	1500 [105]	1500 [105]	1500 [105]	1500 [105]	1500 [105]	1500 [105]
	Cont. 400-800 RPM	725 [50]	725 [50]	725 [50]	725 [50]	725 [50]	725 [50]
	Cont. >800 RPM	290 [20]	290 [20]	290 [20]	-	-	-
Max. Return Pressure with Drain Line PSI [bar]	Int.* 0-max. RPM	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Cont.	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]	2030 [140]
	Int.*	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]	2540 [175]
Max. Starting Pressure with Unloaded Shaft, PSI [bar]	Peak**	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]	3260 [225]
	Cont.	60 [4]	60 [4]	60 [4]	60 [4]	60 [4]	60 [4]
Min. Starting Torque lb-in [daNm]	At max. press. drop Cont.	65 [0,7]	105 [1,2]	190 [2,1]	300 [3,4]	295 [3,3]	330 [3,7]
	At max. press. drop Int.*	90 [1,0]	150 [1,7]	260 [2,9]	425 [4,8]	400 [4,6]	425 [4,8]
Min. Speed***, [RPM]		50	40	30	30	25	20
Weight, lb [kg] For "F" flange: + .441 [0,200]	MLHM(M) rear ports	4.2 [1,9]	4.41 [2]	4.63 [2,1]	4.85 [2,2]	5.07 [2,3]	5.51 [2,5]
	MLHM(M)	4.41 [2,0]	4.63 [2,1]	4.85 [2,2]	5.07 [2,3]	5.29 [2,4]	5.73 [2,6]
	MLHM(M)...P	4.85 [2,2]	5.07 [2,3]	5.29 [2,4]	5.51 [2,5]	5.73 [2,6]	6.17 [2,8]
	MLHM(M)...D	5.73 [2,6]	5.95 [2,7]	6.17 [2,8]	6.39 [2,9]	6.61 [3,0]	7.05 [3,2]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.


** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds lower than given, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm²/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 15-30 minutes.

FUNCTION DIAGRAMS

MLHM 8

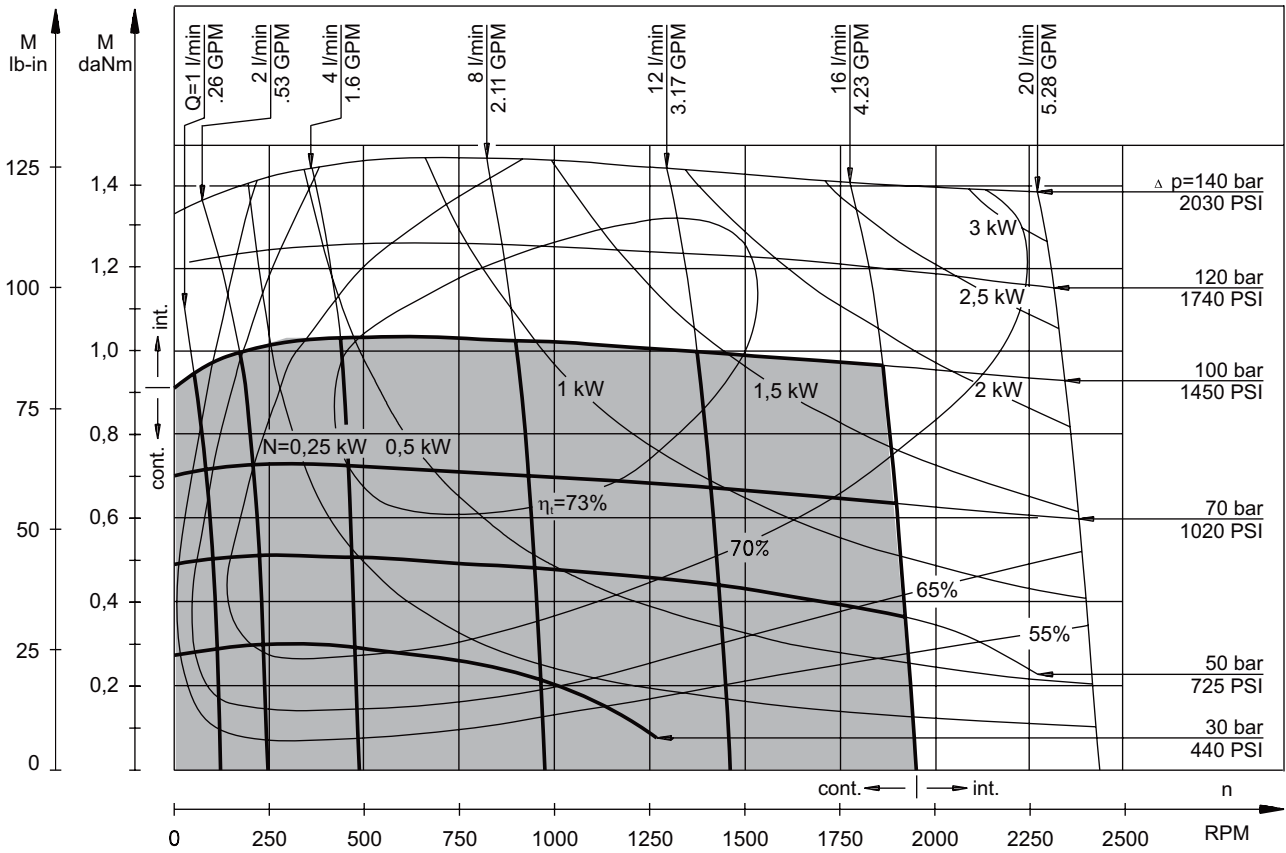


MLHM 12,5

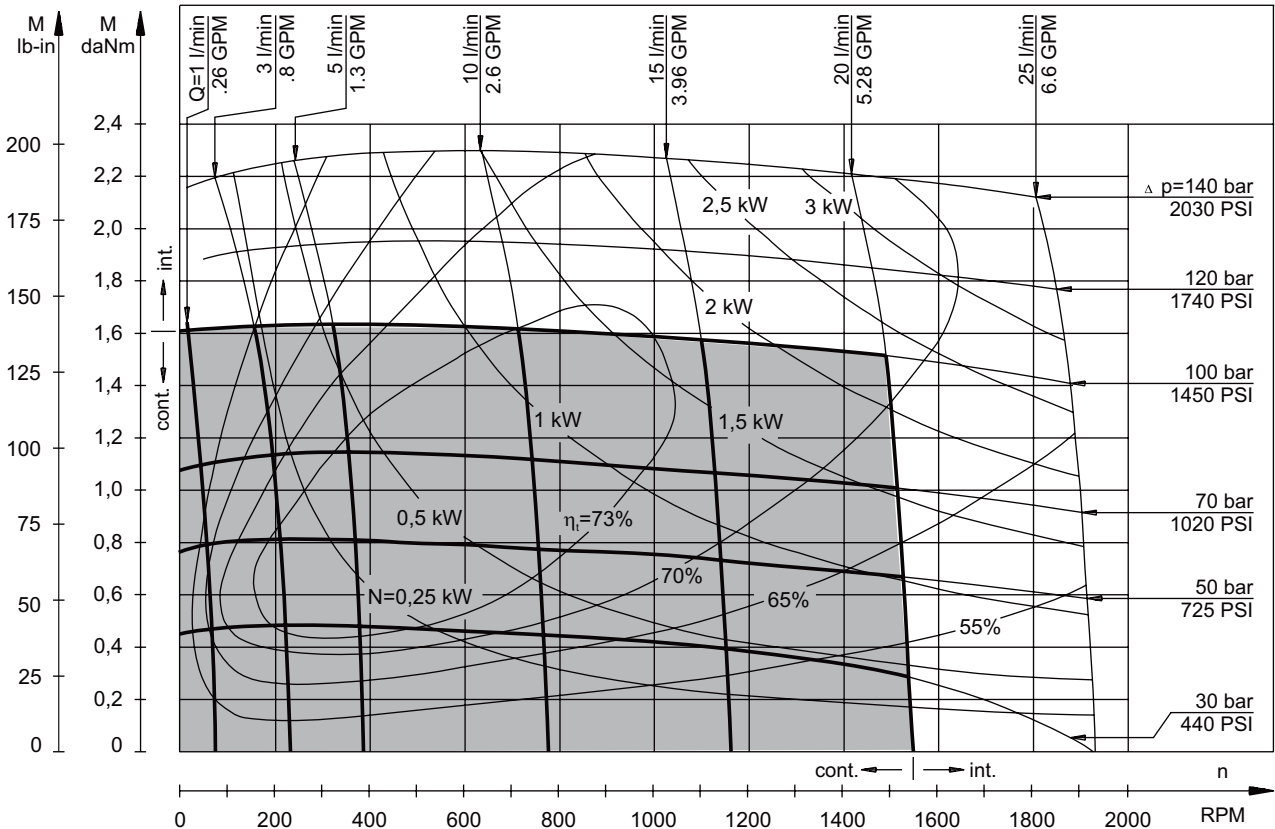


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

FUNCTION DIAGRAMS

MLHM 20

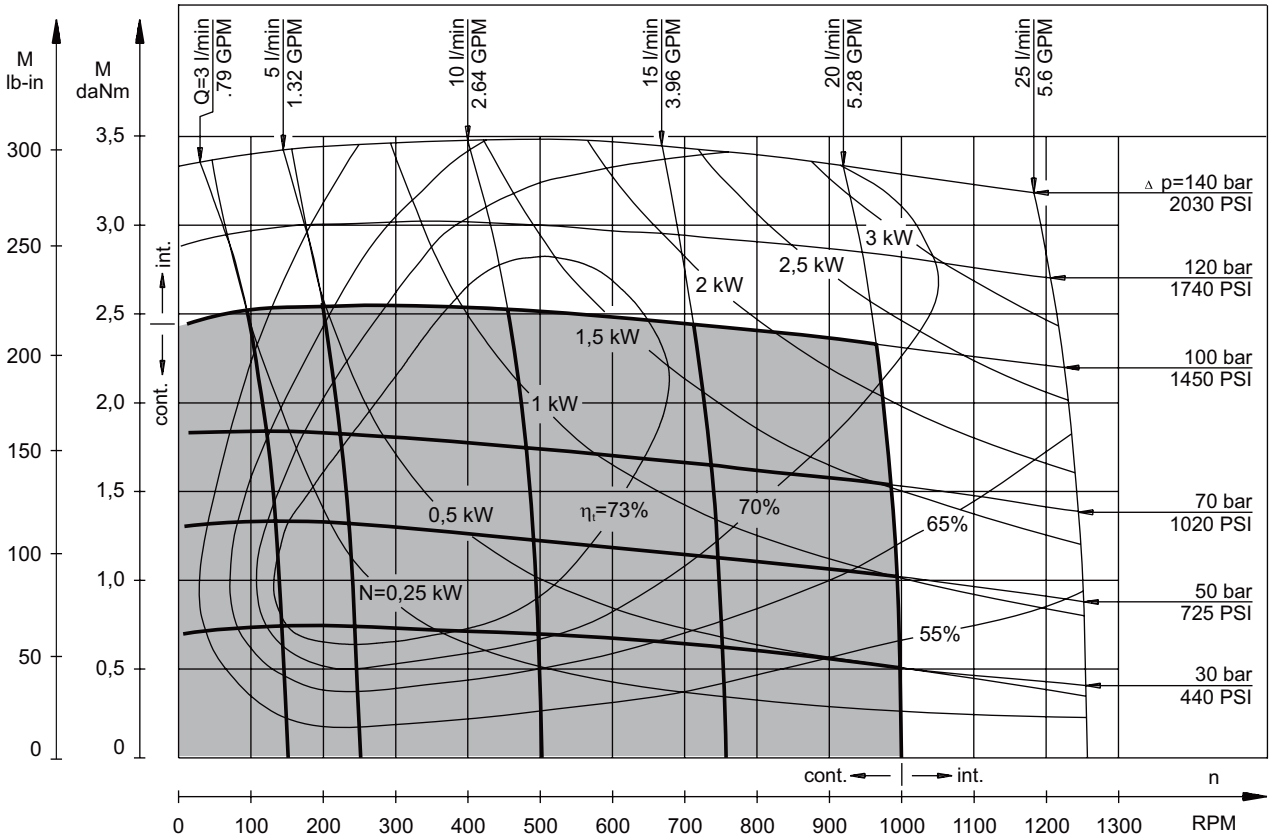


MLHM 32

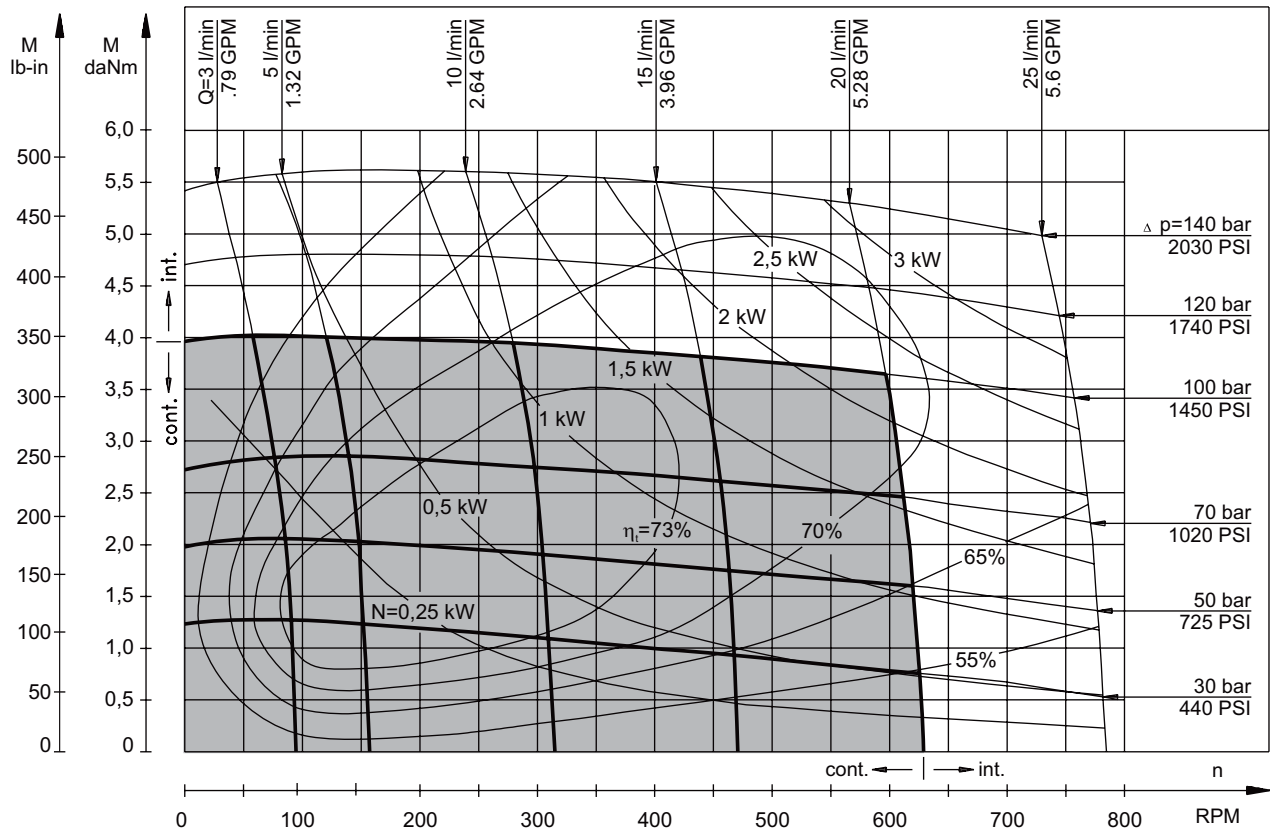


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

FUNCTION DIAGRAMS

MLHM 40

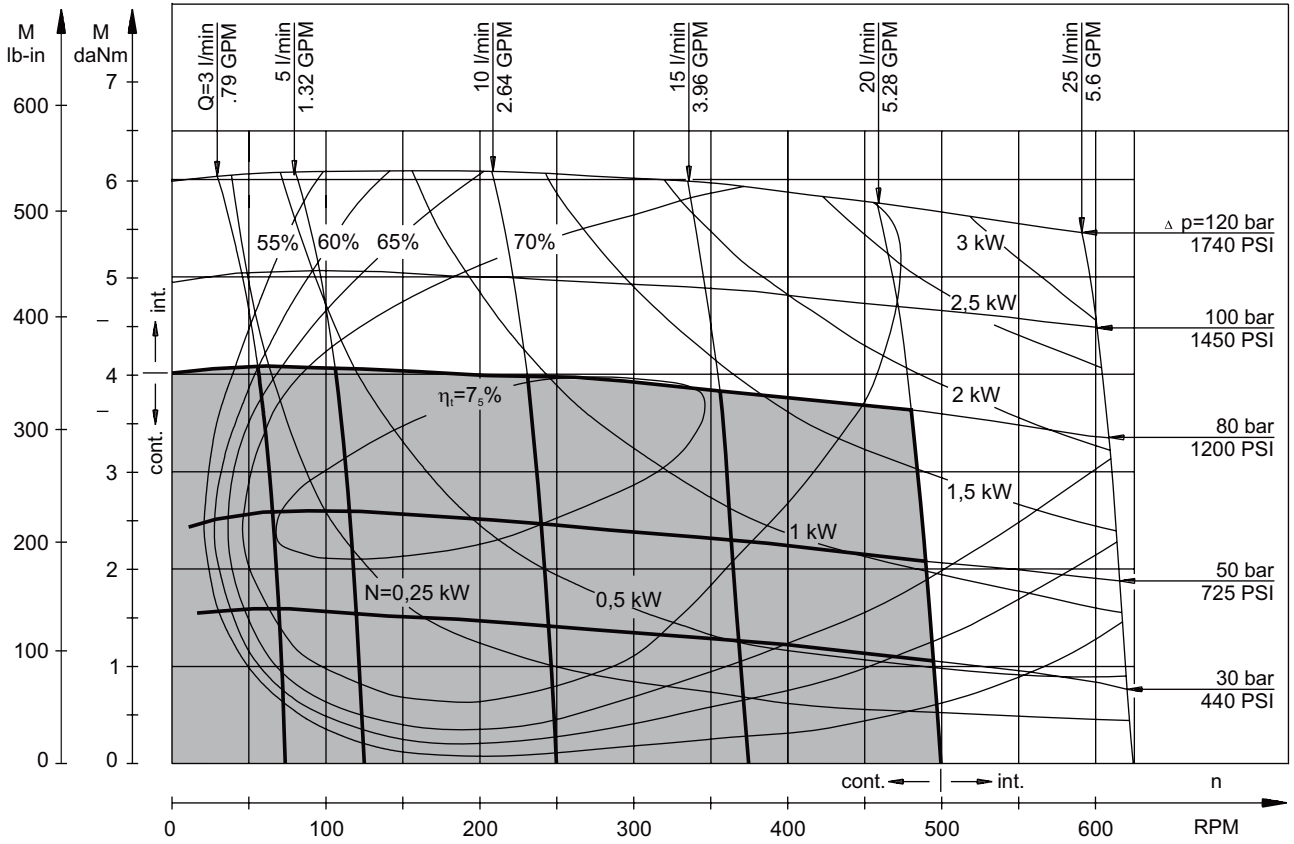


MLHM 50

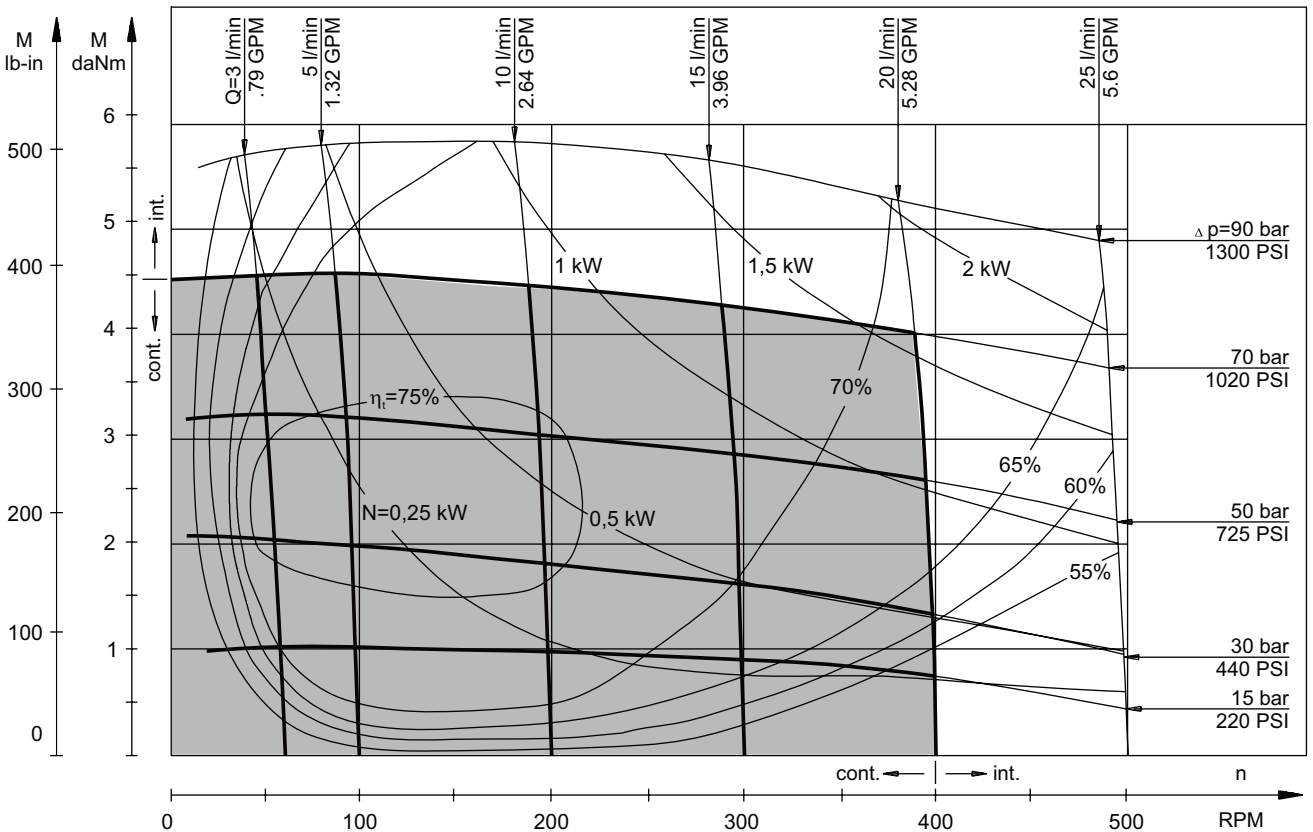

The function diagrams data is for average performance of randomly selected motors at back pressure 72.5÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

DIMENSIONS AND MOUNTING DATA
MLHM, MLHMP, MLHMD

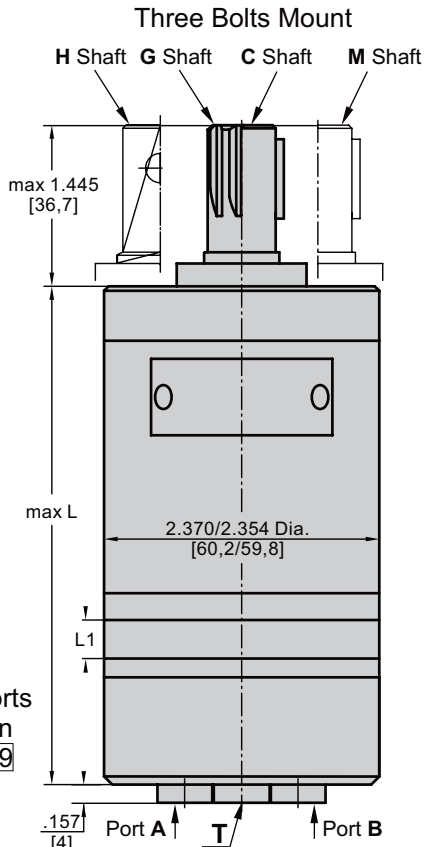


Shaft Dim.
See Page 11

Flange Dim.
See Page 10

Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW

Reverse Rotation
Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW

Port Dim.
See Page 10

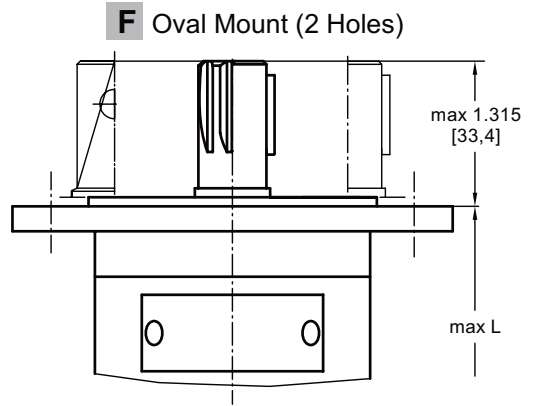

	Versions		
	2, 6	3, 9	4, 7
P _(A,B)	2xG $\frac{3}{8}$	2xM18x1,5	2x $\frac{3}{16}$ -18UNF
T	G $\frac{3}{8}$	M10x1	$\frac{3}{8}$ -24UNF


Rear Ports
Version
6 7 9

Side Ports
Version
2 3 4

P Side Ports

D Side Ports

in [mm]



Type	Side Ports L _{max} , in [mm]	Rear Ports L _{max} , in [mm]	L ₁ in [mm]
MLHM(M) 8	4.134 [105,0]	4.094 [104,0]	.138 [3,5]
MLHM(M)12.5	4.213 [107,0]	4.173 [106,0]	.217 [5,5]
MLHM(M) 20	4.331 [110,0]	4.291 [109,0]	.335 [8,5]
MLHM(M) 32	4.528 [115,0]	4.488 [114,0]	.531 [13,5]
MLHM(M) 40	4.665 [118,5]	4.626 [117,5]	.669 [17,0]
MLHM(M) 50	4.823 [122,5]	4.783 [121,5]	.827 [21,0]


Type	Side Ports L _{max} , in [mm]	Rear Ports L _{max} , in [mm]	L ₁ in [mm]
MLHMF 8	4.272 [108,5]	4.232 [107,5]	.138 [3,5]
MLHMF 12.5	4.350 [110,5]	4.311 [109,5]	.217 [5,5]
MLHMF 20	4.587 [116,5]	4.547 [115,5]	.335 [8,5]
MLHMF 32	4.665 [118,5]	4.626 [117,5]	.531 [13,5]
MLHMF 40	4.803 [122,0]	4.764 [121,0]	.669 [17,0]
MLHMF 50	4.961 [126,0]	4.921 [125,0]	.827 [21,0]

Type	L _{max} , in [mm]	Type	L _{max} , in [mm]
MLHM(M) 8...P	4.528 [115,0]	MLHMF 8...P	4.665 [118,5]
MLHM(M)12,5...P	4.606 [117,0]	MLHMF12,5...P	4.744 [120,5]
MLHM(M) 20...P	4.724 [120,0]	MLHMF 20...P	4.862 [123,5]
MLHM(M) 32...P	4.921 [125,0]	MLHMF 32...P	5.059 [128,5]
MLHM(M) 40...P	5.039 [128,0]	MLHMF 40...P	5.197 [132,0]
MLHM(M) 50...P	5.217 [132,5]	MLHMF 50...P	5.354 [136,0]


Type	L _{max} , in [mm]	Type	L _{max} , in [mm]	L ₁ , in [mm]
MLHM(M) 8...D	5.276 [134,0]	MLHMF 8...D	5.433 [138]	.13 [3,5]
MLHM(M)12,5...D	5.354 [136,0]	MLHMF12,5...D	5.512 [140]	.21 [5,5]
MLHM(M) 20...D	5.472 [139,0]	MLHMF 20...D	5.748 [146]	.335 [8,5]
MLHM(M) 32...D	5.669 [144,0]	MLHMF 32...D	5.827 [148]	.531 [13,5]
MLHM(M) 40...D	5.807 [147,5]	MLHMF 40...D	5.945 [151]	.669 [17,0]
MLHM(M) 50...D	5.965 [151,5]	MLHMF 50...D	6.102 [155]	.828 [21,0]

MOUNTING

Three Bolts Mount

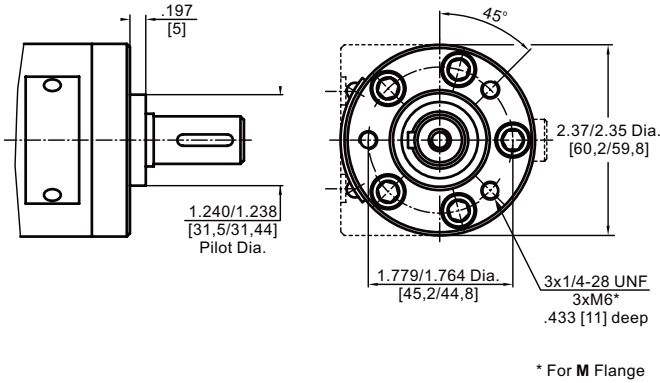


F Oval Mount (2 Holes)

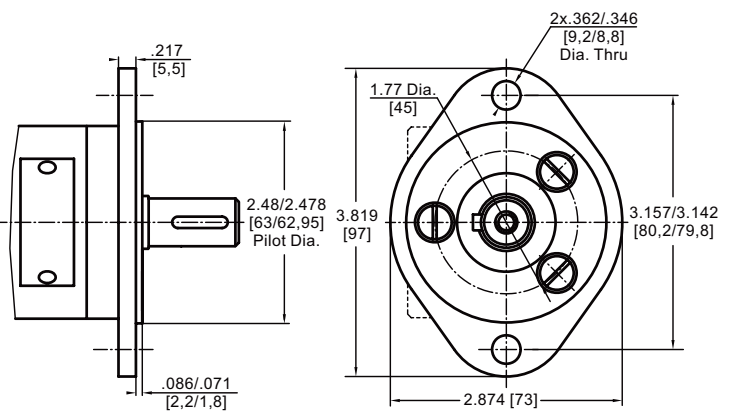


PORTS


Rear Ports
Version **6** **7** **9**

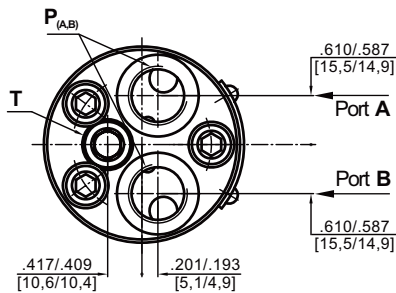


Side Ports, without valves
Version **2** **3** **4**

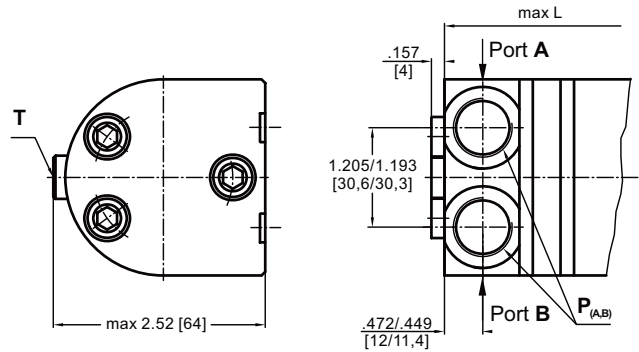

P Side Ports with Single Crossover Relief Valve

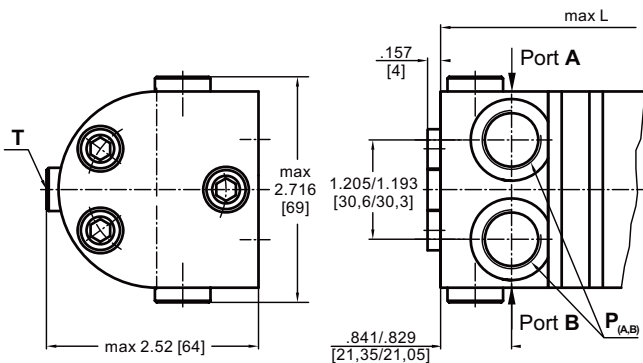

D Side Ports with Dual Crossover Relief Valve

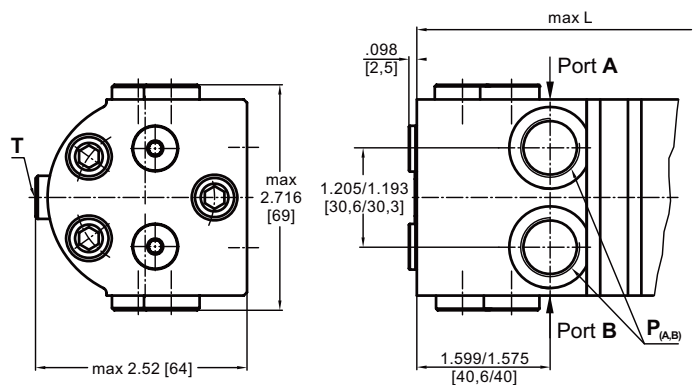

Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW

Reverse Rotation
Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW



		Versions		
		2 , 6	3 , 9	4 , 7
P _(A,B)		2xG $\frac{3}{8}$	2xM18x1,5	2x $\frac{9}{16}$ -18UNF
T		G $\frac{1}{8}$	M10x1	$\frac{3}{8}$ -24UNF